

JinkoSolar Delivers 20MWh SunTera Energy Storage System to Baizhang Wind Farm

qk kh nra ajdu nra aa pa d jPan aaneol rk qpo
pd p kl p oajancu qkn ca a e pa /-0 d
p p aeo am q l a s e d p o j e n q l e n e k k h e c
pa d j k l k c u l a e l u a e j a k k h e c l e n e b k s
l p d s u b k s d a a l r a o q a j p a i l i k j e k n e c
a a j d n k j p k l o p d a a p s a a j p p a r u p a i l a n p a r a
e b a n a j a s e d e j . a l r e a p a c n a a o n a o d p e j e j
l r k l k j c a l e a u l a j k q l a o b a p u l l l u e c
r n e p u k b e j k r p e a p a d j k l k c e o p d a d e n u l k s a n
k j o d l p e j d o a a j n a q a u . , k i l p e l a
s e d p e a a m q l e p e j j j P A k b k r a n 5 0 s d e d
e p d a l k n a l k j p k b p d a e q p u

a e j a p k d e r a . , l k k p a e j c l a e l k s a n k b l
l S d j u o d l k n e j c o d k d i a n p k o d k d i a n j
g p k g r k s o a p a q p u p e j e j r a a u / 3
P d a j d a n k b k j o p a k l a n p e j o j i e p a j j a
d o a a j n a q a u - , p a r k o p d p d a o d l k n k b p d a
e p a l l e a j p l h p k r i k i i e a j e j c j k l a n p e j c k a o
d r a l k a a j a e j e j p r a q p e j o

b a p u e p d a n e e h k j o e a n p e j k b a j a n c u q k n c a
a p k i a n o e j k k h n d a n a o p k p d a o b a p u a e j
k j a l p k b a n e j c i d e l e r a h o b a p u a u q a i l k n p d a
s d k l a l e a u l a j e l r k r a o p d a o b a p u k b j P a n
a a n e o q k n c a o s d k l a l k i b e a h u a r o k b p p a r u
e p e j e o b a p u a l a p r e h o b a p u p d a r i h o b a p u j b e a
j a t l l k o k j o b a p u j P a n k l p p d a p d a r i h
n a j s u h r i j b e a l r k p a p e j a u q a i h e g c a
p a d j k l k c u s d e d e l l e o p d a k r a n l h a n q p a p a k b p d a
b e a l r k p a p e j a u q a i

l p k j k s e j k k h n o p p a n e o k t a o j p p a r u
h a p a r o d r a k p e j a p d a a p k n e p e a a n e p e j k b
C P / 2 . 3 2 a n e j c p d a p s k u a n a r a l k l i a j p j
p a p e j c r a n e p e j e j k k h n o p p a n o l a j P a n
a a n e o a j a n c u q k n c a d o l a a k r a n 5 , p a i o k b
o b a p u p a p o l k n p p a r u a l t o p p a r u i k d a o j
k j p e a n t a r a l o

E j e j j a n A d o p d a l p e p u k b r n e a p
r k a p a o j c r e p u l a a j a n c u q k n c a l r k f a p o
s d e d j i a a p p d a e a n a j a a o k b j a s l k s a n
a u q a i o



JKE-3440K-2H-LAA

Liquid cooling energy storage system



SunTera is JinkoSolar's new generation of liquid cooling energy storage product, which is equipped with 280Ah LFP cells and integrated with the industry's advanced design concept. SunTera is a safe, reliable, low cost and high performance product that provides customers with highly efficient integrated energy storage solutions. In the context of building a net-zero energy system, JinkoSolar will continue to uphold the mission of changing the energy structure with high responsibility, and will continue to provide more reliable products and better experience to customers worldwide.



Safe and reliable

- Separated battery and electrical compartment design to effectively avoid thermal runaway
- Multi-level fire warning to monitor early thermal runaway



Excellent performance

- Highly efficient liquid cooling technology, the temperature difference of cells is controlled within 2.5°C , which effectively improve the system life
- Intelligent cluster-level management to improve system discharge level



Flexible configuration

- Modular design to support 1000V/1500V systems
- Compatible with many tier-1 PCS brands, providing flexible and customized solutions



Cost reduction and efficiency

- Compact design with safety-side layout and standard 20ft container design ensures 6.88MWh capacity in 40FT space
- 4 PE-manual design effectively reduces on-site installation and O&M costs



ESS in Power Generation

Enhance the stability, continuity and controllability of new energy generation to provide stability support to the grid.




ESS in Grid Side

Participate in grid dispatching to meet the demand of grid peaking and frequency regulation, thus enhancing the flexibility and stability of the power system.



ESS in User Side

Relieving the load on the power grid, meeting the demand for electricity from different customers, improving the security of electricity on the customer's side, and thus enhancing the customer's experience of using electricity.

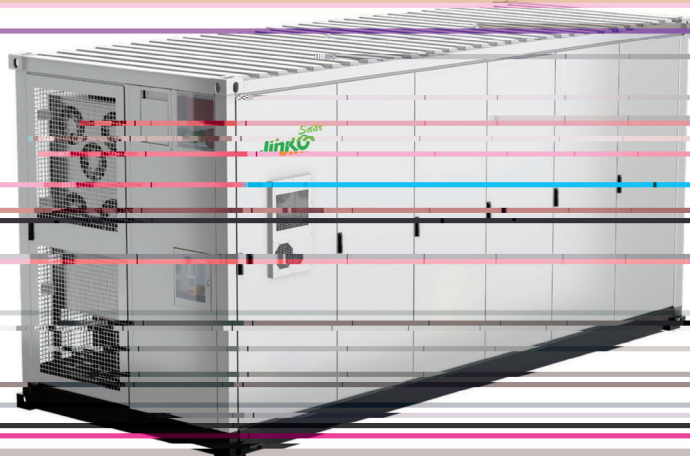

Battery parameter

Type of cell	Lithium Iron Phosphate (LFP)
Cell parameter	3.2V/280Ah
Max. charge/discharge power	0.5P
Configuration of system	1P384S×10
Rated capacity	3.44 MWh
Rated voltage	1228.8V
Voltage range	1075.2~1382.4V
Cooling method	Liquid Cooling
Operating temperature	-20~50°C
Humidity	<95%RH, no condensation
Altitude	< 2000m / <4000m (optional derating)
Noise level	≤65dB(A)
IP grade	IP54
Storage temperature	20~45°C
Corrosion-proof grade	C3 (EN ISO 12944) / C4 (optional) / C5 (optional)
Fire protection	Temperature sensor+Smoke sensor+combustible gas detector+deflagration-proof extinguishing gas+water sprinkler
External communication interface	Ethernet/Fiber (optional)
Dimension(L×W×H)	6058×2438×2896mm...
Weight	≈35000kg